

Surefire Scout Light® Offset Flashlight Mount

NO-HASSLE WARRANTY:

Gear Sector™ guarantees our products to be free from defect in workmanship and materials for the lifetime of the original owner. We will repair, replace or refund your original purchase price of this product, at our sole discretion, if it is determined by us to be defective. Normal wear and tear is not covered, nor is damage resulting from abuse, neglect, or altering this product from its original state.

WARRANTY CLAIMS:

For repair or replacement, contact Customer Service at: 877-556-4327 (toll free). You will be required to complete a returns form located on the returns page of our website. Then package the product carefully and return (no CODs, please) to:

Gear Sector
Warranty Department
PO Box 47
Portage, IN 46368

Gear Sector™ will cover shipping costs to return the product to you.

COUNTERFEIT WARNING:

There have been numerous reported cases of counterfeit Gear Sector™ products on the market. They are most often found at online auction sites and local gun shows. These unauthorized copies are difficult to discern visually. However, be warned that they are made of inferior base materials that can and will fail.

We will not warranty counterfeit copies of our products. If after speaking to customer service, you choose to send an item in for warranty repair and it is found to be a counterfeit product, Gear Sector™ will not pay to return the item. If you want the item returned to you, you will be required to pay return shipping.


To ensure that you get authentic, competitively priced Gear Sector™ products, purchase them only from www.gearsector.com or an authorized Gear Sector™ reseller.

Surefire®, Magpul®, TangoDown® and Vibra-Tite® are registered trademarks of these respective companies. Mention of these companies does not constitute their endorsement of Gear Sector™.

GS-312x

Surefire Scout Light® Offset Light Mount

USER MANUAL

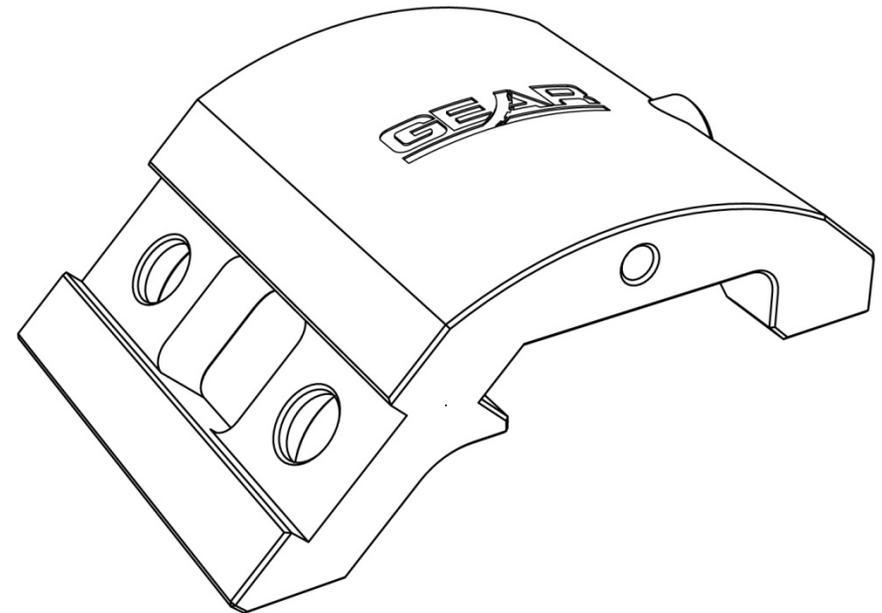

Attaches to Picatinny Rails

Rev. 4-24-2014



PO Box 47, Portage, IN 46368-0047
www.gearsector.com
877-556-4327



Surefire Scout Light® Offset Flashlight Mount

INTRODUCTION:

The Patented [US Patent No. D669,149] Gear Sector™ offset flashlight mount was designed to provide a low profile, ergonomic solution for attaching a weapon light to a Picatinny rail. We designed the mount to fit perfectly flush with the Tango Down® rail panels for an uninterrupted rail space. This model fits the Surefire Scout Light® series lights. It comes complete with all mounting hardware, screws, hex keys, and Vibra-Tite® to make installation fast and easy. Mod 3 components feature a 25% reduction in weight as well as an 1144 StressProof® heat treated full width steel index.

Fits the following lights:

- ✓ LensLight K.O. WM
- ✓ Surefire® M300A Mini Scout Light®
- ✓ Surefire® M300B Mini Scout Light®
- ✓ Surefire® M600B Scout Light®
- ✓ Surefire® M600C Scout Light®
- ✓ Surefire® M600P Fury® Scout Light®
- ✓ Surefire® M600U Ultra Scout Light®

PACKAGE CONTENTS:

- 1ea. Surefire Scout Light® Offset Flashlight Mount
- 2ea. 8×32 5/16ths cap screws for attaching light to mount
- 1ea. 3/32nd hex key for securing light retaining screws
- 1ea. 9/64th hex key for securing mount to rail system
- 1ea. Vibra-Tite® VC3™ anti-vibratory compound.


MATERIALS & CONSTRUCTION:

- Base Material: 6061-T6 Aluminum
- Base Finish: Military Specification (MIL-A-8625F) Type III, Class II Hard Coat and/or Cerakote™
- Index Material: 1144 StressProof® heat treated steel
- Index Finish: Nitrotec®
- Weight: 0.96 ozs.
- 100% Berry Amendment Compliant
- Proudly Made in the USA

⚠ WARNING: Confirm that weapon is unloaded and on SAFE before installation!

INSTALLATION:

1. Using a T9 Torx Key (not included), remove your factory Surefire mount.
2. Remove the socket head cap screw and clamp from the GS-312x base.
3. Apply a drop of Vibra-Tite® VC3™ (included) to the threads on all assembly screws and let sit until tacky - approximately 2-3 minutes.
4. Determine orientation and location where you plan to install the light on your rail system.
5. Install your light to the GS-312x base using the two (2) included 8×32 5/16ths cap screws. Do not exceed maximum torque of 18 inch pounds on the light to base retaining screws. If you do not have a torque driver capable of measuring inch pounds, simply finger tighten and torque an additional 1/8th turn. Ignoring this limit may damage your light body.
6. Install the mount onto your rail system, insert screw / clamp assembly and torque it down with the included 9/64ths hex key. Do not exceed maximum torque of 40 inch pounds for the cross bolt. If you do not have a torque driver capable of measuring inch pounds, simply finger tighten and torque an additional 1/4 turn. Ignoring this limit may damage your mount.

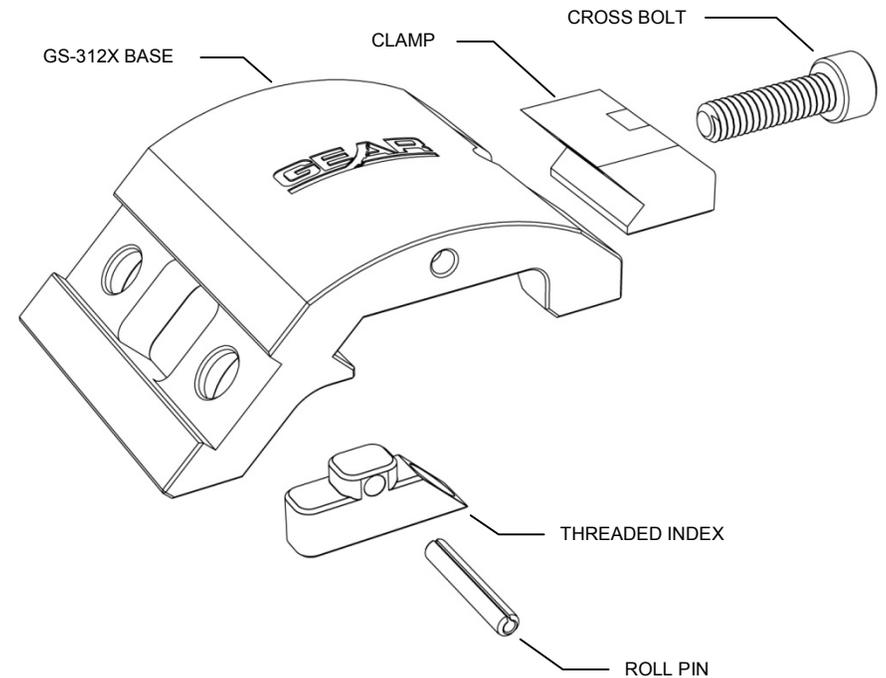

AVAILABLE OPTIONS:

Our Surefire Scout Light® Offset Flashlight Mount is available in the following colors:

- ❖ GS-3120 – Black
- ❖ GS-3121 – Magpul® Flat Dark Earth
- ❖ GS-3122 – Magpul® Foliage Green
- ❖ GS-3123 – Magpul® Olive Drab
- ❖ GS-3124 – Patriot Brown